



REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
B	4-21-16	N/A	SPACER WAS MOUNTED UNDER CLIP, UPDATED MTG HOLE INFO	LDB	NA	N/A


2X #8 - 36 X .500 ROUND HEAD  
SLOTTED MACHINE SCREW  
TORQUE TO 19.8 IN-LBS.






2X #8 REGULAR HELICAL  
SPRING LOCK WASHER



SPACER  
COPPER

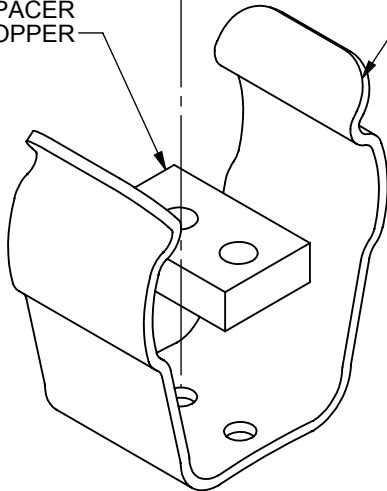

9F61AWW632  
FUSE SUPPORT PARTS  
DWG# 701519

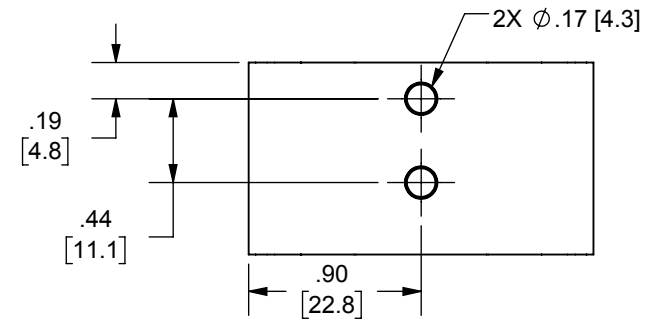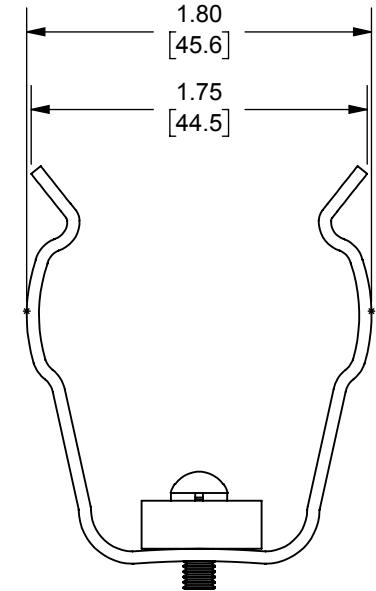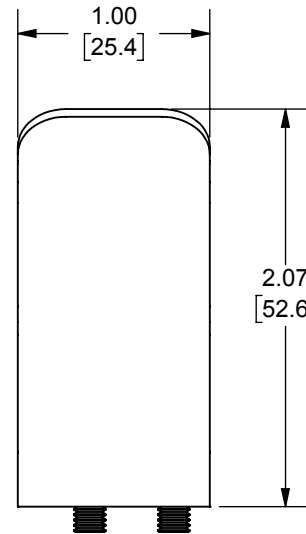

DIMENSIONS IN [ ] ARE MILLIMETERS



MERSEN USA NEWBURYPORT-MA, LLC  
374 MERRIMAC STREET  
NEWBURYPORT, MA 01950

PRODUCT MANAGER

SIGN: L NORDEE

DATE: 4-21-16

DESIGN ENGINEER

SIGN: S MOODY

DATE: 4-21-16

9F61BWW460

SP PT 1.6 IN. D CLIP

OUTLINE DIMENSIONS  
NOT TO BE USED FOR PRODUCTION

701520